

OMRM 125




Otomatik Alttan Çıkma Kesim Makinası Automatic Single Head Cutting Machine



- 0° - 180° ve ara açılarda hassas kesim yapar
- 15°, 22,5°, 30°, 45°, 60°, 90° dereceler için hızlı ayarlama tamponları
- Ara dereceler için tabla sabitleme kolu
- Özel tasarlanmış tabla sayesinde talaş sıkışması önlenmiştir
- Elmas testere çapı Ø450 mm
- Emniyetli kesim için koruma kapağı sivici
- Dikey pnömomatik baskı silindirleri
- Sağ tarafta metreli ve sol tarafta taşıyıcı konveyörü bulunmaktadır (3'er metre)

Opsiyon:


- Alüminyum profil kesimi için hidropnömatik ve soğutma sistemleri

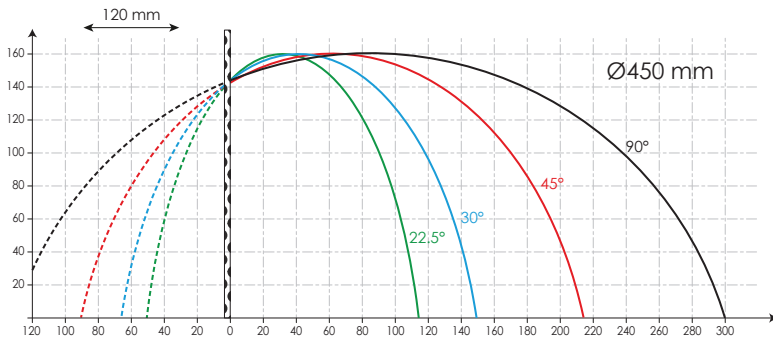

- Cutting range 0° - 180°
- Fixed stops on 15°, 22,5°, 30°, 45°, 60° and 90° angles for fast angle setting
- Additional lock on sliding plate for intermediate angles fixing
- Special design of sliding plate prevents sawdust collecting inside
- Diameter of a diamond saw blade is Ø450 mm
- Protection cover switch for safe cutting
- Vertical pneumatic clamping cylinders
- Equipped with conveyor system: right (with ruler) and left sides - 3,0 mt.

Option:

- Hydropneumatic and cooling systems for aluminium profile cutting

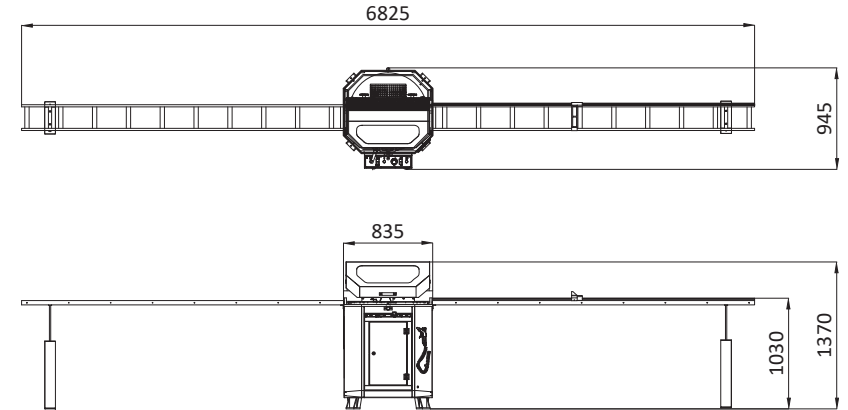

Hz = 50 rpm = 2860 kW = 2,2	V = 400 3P+E+N 50-60 Hz kW = 2,5	Air 6-8 bar 10 t/cycle	kg 270 kg	H = 1370 mm W = 835 mm D = 945 mm ● Conveyor W = 3000 mm D = 300 mm	ØD = 450 mm Ød = 30 mm b = 4 mm z = 120	L min = 440 mm L max = 3300 mm	A = 0° C = 180°
--	---	---------------------------------------	----------------------	--	--	---	----------------------------